

Description

These units are manufactured from zinc coated steel and finished externally as standard in white polyester powder coat. Each bay is provided with a modular lift-out light source consisting of a reflector plate, 2 x 15 watt white fluorescent tubes and all necessary control equipment. Each bay is separately switched at the bottom fascia panel.

PTL produces an ex stock range of viewing screens from one to four bay wide, in both flush and surface mounted styles.

Options

Flush mounted-Similar in all respects to the surface mounted units but with a wide surround on the front face to provide a neat appearance when mounted in a wall recess.


Dimmer-This option may be fitted internally to any bay providing a control of the light source intensity.



Technical Details

Surface Mounted X-Ray Viewers

Model	Description	'A'
XRV 1	1 BAY	375
XRV 2	2 BAY	750
XRV 3	3 BAY	1125
XRV 4	4 BAY	1500

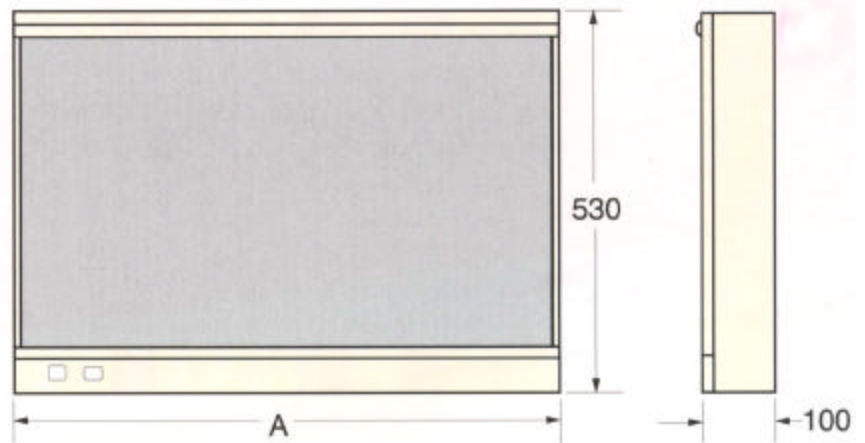

Flush Mounted X-Ray Viewers

Model	Description	'A'
XRV 1F	1 BAY FLUSH	405
XRV 2F	2 BAY FLUSH	780
XRV 3F	3 BAY FLUSH	1155
XRV 4F	4 BAY FLUSH	1530

